



Sumitomo Drive Technologies

Sumitomo, Hansen and Seisa. Three brands, one global power transmission solutions provider. Sumitomo Drive Technologies has facilities strategically located throughout the world, providing comprehensive products and services in your region.

- ★ MANUFACTURING HUB
- ASSEMBLY & SERVICE
- SERVICE
- ▲ REGIONAL SALES OFFICE



Sumitomo Machinery Corporation of America  
[www.SumitomoDrive.com](http://www.SumitomoDrive.com)

For worldwide locations, please visit [www.sumitomodrive.com/worldwide](http://www.sumitomodrive.com/worldwide)  
Contact your local representative at [www.sumitomodrive.com/representative](http://www.sumitomodrive.com/representative)  
Tel: 1-800-SM-CYCLO (762-9256) 01.001.51.10 Product Showcase 2024



Product Showcase





*We offer a comprehensive lineup of high quality power transmission products.*

*For any of your power transmission needs, we have the right product for you.*


## ***Robust, Reliable, Efficient***

## ***No Matter the Application***



### **C CYCLO® 6000**

- Up to 235 HP (175 kW)
- 1/2in to 7in (Solid Shaft)
- Up to 603,000 lb•in (68,130 N•m)
- 3:1 up to 658,503:1



### **H HYPONIC®**

- Up to 15 HP (11 kW)
- 3/4in to 2in (Hollow & Solid)
- Up to 13,100 lb•in (1,480 N•m)
- 5:1 up to 1,440:1



### **B4 CYCLO® BBB 4**

- Up to 100 HP (75 kW)
- 1in to 4-15/16in (Hollow & Solid)
- Up to 159,983 lb•in (18,076 N•m)
- 11:1 up to 26,000:1 and greater



### **MC MOTION Control**

- Zero mechanical backlash
- Up to 138mm (Hollow Bore)
- Up to 265,522 lb•in (30,000 N•m)
- 29:1 up to 283:1



### **HB CYCLO® HBB**

- Up to 40 HP (30 kW)
- 1-3/16in to 6-1/2in (Hollow Bore)
- Up to 75,800 lb•in (8,564 N•m)
- 11:1 up to 26,492:1




### **HS HELICAL Shaft Mount**

- Up to 300 HP (224 kW)
- 107 to 608 (Hollow Bore)
- Up to 388,884 lb•in (43,938 N•m)
- 5:1, 9:1, 14:1, 20:1, 25:1



### **INVERTERS E3 & P2**

- Up to 400 HP / 480 A
- 200 to 600V (Single & 3-Phase)
- Up to 200% (From Zero Speed)
- Up to 200% Overload (4 secs)

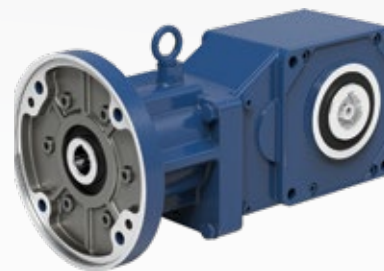

### **BH BBB-H**

- Up to 15 HP (11 kW)
- 1in to 2-3/16in (Hollow)
- Up to 9,028 lb•in (1,020 N•m)
- 5:1 up to 20:1



### **F FORTRESS®**

- Up to 2 HP (1.72 kW)
- 3/4in to 1-7/16in (Hollow & Solid)
- Up to 2,190 lb•in (247 N•m)
- 7:1 up to 60:1



### **PX PARAMAX® 9000**

- Up to 5,230 HP (3,900 kW)
- 58mm to 360mm (Hollow & Solid)
- Up to 4.9m lb•in (552,000 N•m)
- Up to 500:1 Standard



### **P4 HANSEN P4**

- Up to 14,080 HP (10,500 kW)
- 3.15in to 15.75in (Solid Shaft)
- Up to 9.7m lb•in (1.1m N•m)
- Up to 630:1 (and custom ratios)



### **U PARAMAX® UniMiner**

- Up to 600 MHP (450 kW)
- 105mm to 190mm (Solid)
- Up to 894,000 lb•in (101 kNm)
- 10:1 to 35.5:1



• "H" Foot



• V-Flange



• F-Flange



• MOUNTING

• Top Mount



• Quill



• Free Shaft



• Shovel Base



• C-Face Motor



• Integral Motor



• Coupled C-Face



• INPUTS

## SEALS

Wear sleeves and pressure-rated to prevent leaks.

## HOUSING


Rugged, shock-resistant cast iron housing. Optional ductile iron housing also available.

## RING GEAR HOUSING

High power density, all reduction contained in compact ring gear housing.

## 500% MOMENTARY SHOCK LOAD

The Cyclo® design spreads the load across 2/3 of the reduction components, enabling the units to absorb and dissipate shocks better than typical concentric drives.

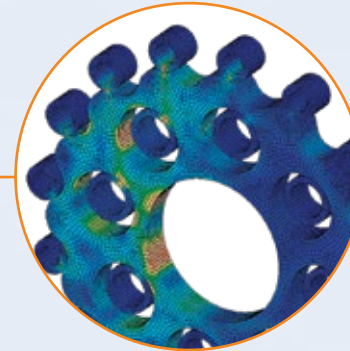

## CYCLO® DISC

All rotating components are fully hardened, vacuum degassed bearing-grade steel, for consistent, reliable performance.

## DYNAMIC AIR MOTIVATOR

## MOTIVATOR COVER

## HIGH-SPEED SHAFT



\* Rating applies to specific products.

## OIL LEVEL INDICATOR

## SLOW-SPEED SHAFT

## ECCENTRIC CAM

# CYCLO® 6000

## UNMATCHED RELIABILITY & EXCEPTIONAL PERFORMANCE

Cyclo® speed reducers and gearmotors are the **premier in-line drives**. The revolutionary Cyclo® design provides **quiet, efficient, and reliable** performance exceeding that of involute tooth gear designs.

Unlike geared designs, the Cyclo®'s reduction components operate in compression rather than shear, which results in exceptionally rugged and **shock resistant** performance.

The Cyclo® technology coupled with innovative product options and accessories offer the most extensive range of application solutions available.

## MOBIL SHC™ GEAR HI-SHOCK 150

- High-Performance Synthetic Lubricant
- Available for Cyclo® Products
- Extends the Life up to 3 Times
- Available 4-Year Warranty

## OPTIONS



Overhead Drive



Extended Base



Industry Packages

## SPECS



**HP RATING**  
Up to 235 HP  
(175 kW)



**DIAMETER**  
1/2in to 7in  
(Solid Shaft)



**TORQUE**  
Up to 603,000 lb-in  
(68,130 N-m)



**RATIO RANGE**  
3:1 up to 658,503:1



• Foot Mount • Shaft Mount • Flange



## MOUNTING

• Plug-In-Shaft • Shrink Disc



• Keyed Hollow Bore




• Quill



• Coupled C-Face



• Integral Motor



## INPUTS & OUTPUTS

## QUALITY HOUSING

Aluminum housing is lighter and increases thermal rating.

## SEALS

Multiple lip, harsh duty, and food-grade designs available to prevent leaks.

## DUAL BEARING SUPPORT



## HYPOID PINION

Single-piece all steel hypoidal pinion for longer life. Lasts millions of cycles without measurable wear.

## DUAL BEARING SUPPORT

## ALL-STEEL HYPOID GEARING

Patented Hyponic® gear technology is up to 93% gear efficient across all ratios providing a smooth, quiet operation which does not require a cooling fan.

## QUILL O-RING

Prevents water intrusion.

## C-FACE QUILL

Supported by two bearings for long life, the quill style motor adapter allows for maximum motor flexibility.



## REQUIRES NO OIL CHANGES AND UP TO 93% EFFICIENT

The Sumitomo Hyponic® gearing represents **hypoid gearing excellence**. With millions of Hyponic® units currently in service, the product features a compact, modular housing, maintenance-free grease lubrication and boasts a **gear efficiency of up to 93%** across all ratios.

The **maintenance-free** grease lubrication enables the unit to be mounted in any orientation without custom modifications. In addition to general-purpose solutions, with multiple food grade options, Hyponic® is perfect for **harsh, high-pressure wash-down environments**.

Simplify your gear drive assembly and increase efficiency by switching to Hyponic®.

## OPTIONS



Stainless Steel Motor



SHIELD360® Protection



EasyGrip™

## SPECS



**HP RATING**  
Up to 15 HP  
(11 kW)



**DIAMETER**  
3/4in to 2in



**TORQUE**  
Up to 13,100 lb·in  
(1,480 N·m)



**RATIO RANGE**  
5:1 up to 1,440:1









## B4 CYCLO® BEVEL BUDDYBOX® 4

### RIGHT ANGLE SPIRAL BEVEL WITH CYCLO® OR PLANETARY INPUTS

A robust, state-of-the-art, mid-sized suite of speed reducers and gearmotors. The Cyclo® BBB4 has a unique combination of features that result in a **highly reliable, efficient, and durable gearbox**. The all-steel internal construction, Cyclo® or planetary gear inputs and the ductile iron housing, provide **unmatched ruggedness**.

Also available as a **mixer drive** with an **integrated drywell** and space-saving footprint.

### MOBIL SHC™ GEAR HI-SHOCK 150

- High-Performance Synthetic Lubricant
- Available for Cyclo® Products
- Extends the Life up to 3 Times
- Available 4-Year Warranty



### SPECS



**HP RATING**  
Up to 100 HP  
(75 kW)



**DIAMETER**  
1in to 4-15/16in  
(Hollow & Solid)




**TORQUE**  
Up to 159,983 lb·in  
(18,076 N·m)



**RATIO RANGE**  
11:1 up to 26,000:1  
and greater

- Flange Mount
- Shaft Mount

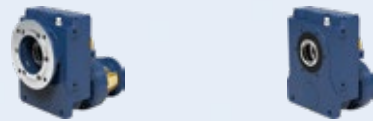

## MOUNTING

- Keyed Hollow Bore



- Taper-Grip® Bushing



- Gearmotor



- Quill



- C-Face



## INPUTS & OUTPUTS

### LONG LIFE BEARINGS

Oversized, heavy-duty bearings for maximum strength and service life.

### MOBIL SHC™ GEAR HI-SHOCK 150

- High-Performance Synthetic Lubricant
- Available for Cyclo® Products
- Extends the Life up to 3 Times
- Available 4-Year Warranty

### HELICAL GEARING

Hardened-steel gearing.



### MONOBLOC HOUSING

Cast iron housing is strong, corrosion resistant, and sound dampening. Monobloc design eliminates leaks at housing split.

### CYCLOIDAL TECHNOLOGY

Utilizes all Cyclo® input modifications to produce high ratios in amazingly small spaces.

### DOUBLE OUTPUT SEALS

### TAPER-GRIP BUSHING®

Our patented Taper-Grip® bushing system offers simple shaft mounting and provides self-aligning, backlash-free torque transmission to the driven shaft.

### HIGH SPEED SHAFT

## OPTIONS



CEMA Screw  
Conveyor Drive

## SPECS



**HP RATING**  
Up to 40 HP  
(30 kW)



**DIAMETER**  
1-3/16in to 6-1/2in  
(Hollow Bore)



**TORQUE**  
Up to 75,800 lb•in  
(8,564 N•m)



**RATIO RANGE**  
11:1 up to 26,492:1

# HB CYCLO® HELICAL BUDDYBOX®

## INNOVATIVE SHAFT MOUNTED DRIVE SOLUTIONS FOR DEMANDING APPLICATIONS

The Cyclo® HBB combines the **quiet, efficient, and reliable** performance of the Cyclo® input with the **rugged helical gear output**. The modular design provides a compact, efficient product and the most flexible range of output speed and torque combinations available.

The simple splash lubrication system extends the life of the unit and the highly efficient design has **no thermal limitations** which eliminates the need for an external fan.



• **Shaft Mount** • **Flange Mount**



## MOUNTING

• **EasyGrip™**



• **Shrink Disc**



• **Keyed Hollow Bore**



• **Gearmotor**



• **Quill**



• **C-Face**



## INPUTS & OUTPUTS

## QUALITY HOUSING

Aluminum housing is lighter and increases thermal capacity.

## HARDENED STEEL GEARING

## SEALS

Multiple lip, harsh duty, and food-grade designs available to prevent leaks.

## BEVEL PINION & HELICAL GEARING

A combination of power and speed. Up to 97% gear efficient across all ratios providing a smooth, quiet operation which does not require a cooling fan.

## BEVEL PINION

Single-piece all steel bevel pinion for longer life. Lasts millions of cycles without measurable wear.

## C-FACE QUILL

Supported by two bearings for long life, the quill style motor adapter allows for maximum motor flexibility.

# BH BEVEL BUDDYBOX® H SERIES

## EXTREMELY EFFICIENT AND COMPACT WITH LOW REDUCTION RATIOS

The combination of a **Bevel Input** and a **Helical Output** make this unit **extremely efficient** with the capacity for input speeds up to **3,600 rpm**. Dependable **hardened steel gearing** inside a **lightweight, compact housing** allows for **easy installation** with less load on the head shaft. Aluminum construction provides **high thermal capacity**.

The **maintenance-free** grease lubrication enables the unit to be mounted in any orientation without custom modifications. The **greater efficiency** of the BBB-H allows for use of a **smaller motor**, resulting in the same performance with much **lower operating costs**. Its **power** and **speed** make this unit perfect for airport baggage handling and general conveying applications.

## OPTIONS



C-Face Motors



SHIELD360® Protection

## SPECS



**HP RATING**  
Up to 15 HP  
(11 kW)



**DIAMETER**  
1in to 2-3/16in  
(Hollow Bore)



**TORQUE**  
Up to 9,028 lb•in  
(1,020 N•m)



**RATIO RANGE**  
5:1 up to 20:1



**Paramax® UniMiner**  
Flippable housing and horizontal split line make the ideal alignment-free drive package for mining.



**SPECIAL DRIVE CONFIGURATION**

• Solid Shaft



• Shrink Disc



• Keyed Hollow Bore



**OUTPUTS**

**SPLIT HOUSING**

Standard in large frame sizes to allow easy maintenance. A large inspection port provides a window for gear inspection. Available in standard gray cast iron with ductile and fabricated steel options.

**TACONITE SEAL**

3-part oil seal with two NBR (Nitrile) double-lipped oil seals and a rechargeable grease chamber between, absorbing material. Seal-wearing particulate is 'purged' with fresh grease.

**SLOW SPEED SHAFT**

JIS SCM440H or AISI 4140H material or equivalent, interfering/fitted keys, and interference fit gears. Suitable for stop/starts and reversing applications.

**CASE CARBURIZED & GROUND GEARING**

High precision carburized gearing with a 25° pressure angle offers a thicker dedendum and higher strength ratings than the typical 20° pressure angle.

**HIGH TENSILE SHAFT**

Strong shaft material optimized for extended operation in rugged environments.

**TIER 1 SUPPLIER ROLLER BEARING**

High capacity bearings increase load capacity without increasing lead-time. Tapered, double-row spherical, or cylindrical roller bearings depending on size and configuration.

**PX PARAMAX® 9000**

**PARALLEL & RIGHT ANGLE LARGE INDUSTRIAL GEARBOXES**

Paramax® parallel and right angle drives are some of the **largest and most durable** power transmission systems operating in the world. The series features **double, triple, quadruple reduction** gearboxes, global standardization and availability, and support from our worldwide facilities.

**Optional Accessories:** Backstops, Motor Mount Options, Seal Upgrades, Heating & Cooling and Lubrication Solutions, Paint Upgrades, Storage and Packaging Options, and Complete Drive Package Solutions.

**DRIVE PACKAGE**


Swing Base



Baseplate



Motor Lantern



**SPECS**



**HP RATING**  
Up to 5,230 HP  
(3,900 kW)



**DIAMETER**  
58mm to 360mm  
(Hollow & Solid)



**TORQUE**  
Up to 4.9 million lb•in  
(552 kN•m)



**RATIO RANGE**  
Up to 500:1  
Standard



• **Keyed Hollow Bore**



• **Extended Bearing Housing**



• **Oversized Solid Shaft**



• **Normal Solid Shaft**



## MIXER OPTIONS

• **Extended Bearing**



• **Pilot or Flange Mount**



• **Hollow Shaft**



## OUTPUTS

## SPLIT HOUSING

Rugged, split housing for horizontal and vertical applications. Round housing tops help keep the unit free from debris.

## GEARS

High torque geometry in low-speed gears. Low-noise geometry in high-speed gears.

## PINION SHAFTS

Rigid standardized pinion shafts and housings for better lateral load distribution.

## SLOW-SPEED SHAFT

Shaft projections include captured keyways with rounded end key inserts to eliminate stress concentrations.

## INTERNAL HOUSING

Exceptional construction ensures bearings are lubricated at start-up to maximize reliability and life.

## VARIATIONS

Vertical



Horizontal



Single-Stage



## SPECS



**HP RATING**  
Up to 14,080 HP  
(10,500 kW)



**DIAMETER**  
80mm to 400mm  
(Solid, Heavy-Duty,  
and Hollow)



**TORQUE**  
Up to 9.7 million lb•in  
(1.1 million N•m)



**RATIO RANGE**  
Up to 630:1 (Custom  
ratios available)


# P4 HANSEN P4

## REMARKABLE POWER AND PERFORMANCE WITH LOW NOISE

The Hansen P4 multi-stage gear unit is **market leading in quality and technology**, excelling in **reliability and durability**. The rugged housing, along with our commitment to innovating state-of-the-art technology, provides remarkable **power and performance**.

The unique **Oil-Lock™** system offers a **maintenance-free** seal on high speed shaft extensions, designed to keep the oil in and dirt out.

**Optional Accessories:** Backstops, Motor Mount Options, Multiple Sealing Upgrades, Various Heating, Cooling, and Lubrication Options, Heavy Duty Paint or Packaging Options, and Complete Drive Package Solutions.

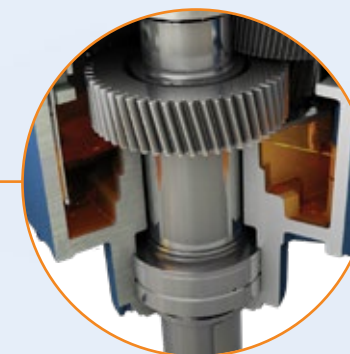

## INTEGRATED DRYWELL

Cast into 3 and 4 stage vertical housings mean this option provides a truly leak-proof low-speed shaft.

## HIGH-SPEED SHAFT

Extra long high-speed shaft projections suitable for interference-free coupling connections.

## MAINTENANCE-FREE OIL-LOCK®

Standard high-speed seal arrangement.





E-CYCLO®  
Strain Wave

A-Series



C-Series



UA-Series



DA-Series



FINE CYCLO®  
Cycloidal

Servo Hyponic®




Servo Bevel BuddyBox®



Servo Cyclo®



ADVANCED  
GEARBOXES

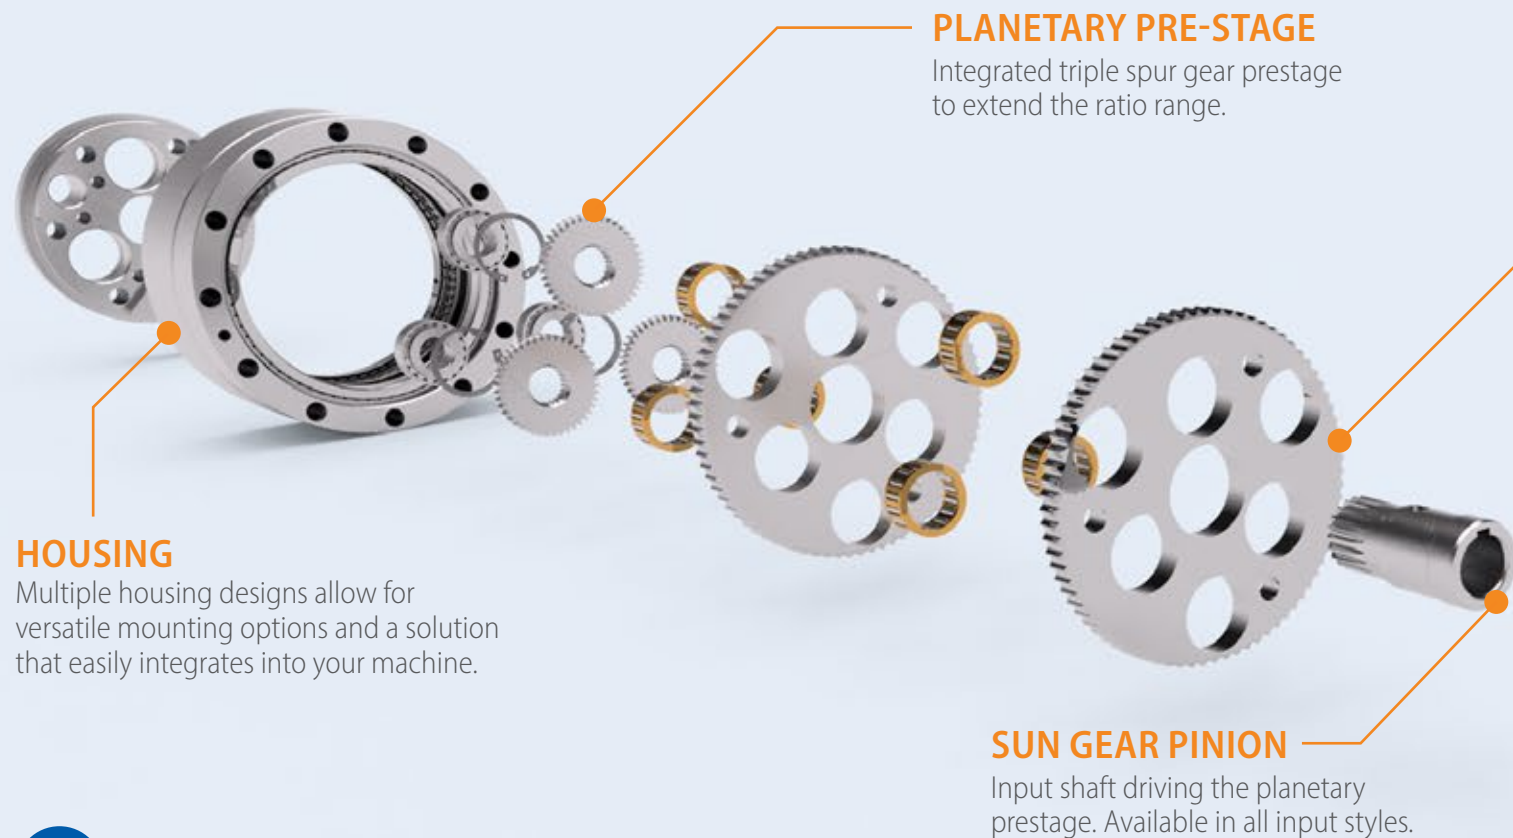

HOUSING


Multiple housing designs allow for versatile mounting options and a solution that easily integrates into your machine.

PLANETARY PRE-STAGE

Integrated triple spur gear prestage to extend the ratio range.

SUN GEAR PINION

Input shaft driving the planetary prestage. Available in all input styles.

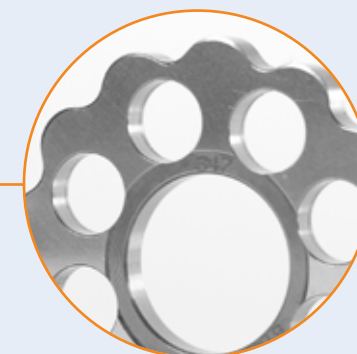

CYCLO® DISC

The same proven Cyclo® technology found in our industrial reducers, designed and optimized for precision applications where zero backlash is required.

ECCENTRIC SHAFTS

BEARINGS

SEALS

OUTPUT

## MC MOTION CONTROL

### ZERO BACKLASH AND INDUSTRIAL SERVO GEARING

Our Precision Gearboxes are the **most extensive zero-backlash product offering** on the gearbox market. Each style has the option to be fully sealed with a motor flange of your choice.

#### Cycloidal Gearboxes

Fine Cyclo® offers **pure cycloidal** zero-backlash gearing and integrated **spur + cycloidal** zero-backlash gearing for the robotic, machine tool, SATCOM, and material handling automation industries.

#### Strain Wave Gearboxes

The E-Cyclo® blends strain wave reduction and cycloidal engagement technologies to provide zero-backlash performance with **exceptionally high torsion** and **low moments of inertia**.

#### Advanced Servo Gearboxes

The **sturdiness** and **reliability** of Sumitomo's premium industrial gearboxes **modified** for inclusion into **servo systems**.

SPECS



**NOM TORQUE**  
Up to 12,000 N•m  
(106,209 lb•in)



**DIAMETER**  
Up to 138 mm  
(Hollow Bore)



**ACCEL TORQUE**  
Up to 30,000 N•m  
(265,522 lb•in)



**RATIO RANGE**  
29:1 to 283:1



**INPUT SPEED**  
Up to 10,260 RPM

#### Servorun Sizing Software

As part of our support in the design phase of new applications, our sizing software Servorun verifies the gearbox selection as well as motor suitability.



# OPTIDRIVE E3

## GENERAL PURPOSE DRIVE

Compact, robust, and reliable general purpose drive.

Focused on ease of use, Optidrive E3 provides unrivaled simplicity of installation, connection, and commissioning, allowing the user to benefit from precise motor control and energy savings within minutes.

Available in IP66/Nema 4X outdoor rating with tough polycarbonate plastics specifically chosen to withstand degradation by ultraviolet (UV), greases, oils, and acids. Also, robust enough not to be brittle at -20°C (-4°F).

- 150% Overload for 60 secs
- 175% Overload for 2.5 secs
- 98% Efficiency

 Compliant with international standards.



### ENCLOSURES



**INTEGRATED DISPLAY**  
Remote Keypads provide real time operating information display and parameter access.

### FAST CONNECTION

5mm rising clamp terminals with captive screws.

### KEYHOLE MOUNTS

### QUICK REFERENCE

Integrated help card.

### OPTISTICK SMART

Rapid Commissioning Tool that allows copying, backup, and the restoring of drive parameters.



### DUAL ANALOG INPUTS

### INTEGRATED CABLE MANAGEMENT

### PLUGGABLE CONTROL TERMINALS

### FANS

High quality long-life fans.

## OPTIDRIVE P2

### HIGH PERFORMANCE DRIVE

High-performance variable frequency drive for standard induction and permanent magnet motors.

A user-friendly interface and high performance make it perfect for tackling the most demanding applications smoothly.

Extensive I/O and communications interface capabilities ensure the drive can be integrated quickly and efficiently into a wide variety of control systems.

Dedicated Hoist Mode Operation with motor holding brake control make it perfect for marine and elevator applications.

- 200% Overload for 4 secs
- 98% Efficiency
- Integral Brake Transistor

### SPECS



**HP RATING**  
Up to 400 HP  
(250 kW)



**POWER OPTIONS**  
Single-Phase: 200-240V  
3-Phase: 200-600V



**TORQUE**  
Up to 200%  
(From Zero Speed)





### Helical Shaft Mount

Provides a simple and convenient equipment interface by mounting directly on the drive shaft. Uses our patented Taper-Grip® Bushing for quick reducer mounting and removal.

**Torque:** Up to 388,884 lb•in  
(43,938 N•m)

**Ratio:** 5:1, 9:1, 14:1, 20:1, 25:1

**HP:** Up to 300 HP (224 kW)



### Altax®

Using our Cyclo® technology, the exceptionally robust Altax® line is compact and low noise. All models are maintenance free with grease lubrication. Altax® caters to a broad range of applications.

**Torque:** Up to 4,054 lb•in  
(458 N•m)

**Ratio:** Up to 1,003:1

**HP:** Up to 5 HP (3.7 kW)



### Custom Gear Drives

Custom Mill, Planetary, and High-Speed Drives available in a wide range of configurations. Tough, compact, and application specific designs for unique applications including API requirements.

**Torque:** Up to 6,515,000 lb•in  
(736,000 N•m)

**Ratio:** Up to 1,400:1

*Custom ratios available*



### Motors

EPNA motors are high performance, exceptionally cool running long lived motors with corona resistant insulation.

- UL, CSA, DOE Compliant
- NEMA Premium Efficient
- IP55 Ingress Protection
- Inverter Ready, 10:1 Turndown
- Up to 75 HP (55 kW)

### Encoders

Two standard incremental types:

- 1) For non-brakemotors: AV32 magnetic type.
- 2) For brakemotors, or other uses: HS25A optical design.

**Vibration:** 5 to 2,000 Hz

**Shock:** 50G, 11 mS duration

**Speed:** 6,000 RPM

**Ingress Rating:** IP65



### Gear Couplings

**Torque:** Up to 57m lb•in  
(6.4m N•m)

**Bore Size:** Up to 35in

**Type:** Gear



Online product configurator streamlines the selection process, enabling *you* to build our power transmission products for your specific application.  
[www.SumitomoDrive.com/Configurator](http://www.SumitomoDrive.com/Configurator)



Same day, 1-day, and 2-day shipping on many of our standard products. For more information about Quick Ship, please consult your Sumitomo representative.  
[www.SumitomoDrive.com/QuickShip](http://www.SumitomoDrive.com/QuickShip)



*Retro-Fit units with transition bases allow us to match your existing footprint.*

*Custom drop-in units made to match existing unit's critical dimensions.*

## Retro-Fits and Drop-Ins

Whatever your requirements, we have a solution for you. Sumitomo Drive Technologies offers customized bases which allow our units to match the footprint of an array of existing applications and drop-in gear drives to upgrade and replace competitor units.

With a wide range of options, our engineers can replace your unit with minimum impact while delivering a premier product with performance and reliability.

### Retro-Fit


*Match existing footprint*

A custom transition base will position the new low-speed shaft to be in the EXACT same position as the original low-speed shaft. Our retrofits provide an excellent balance between the cost savings of a standard gearbox and the benefits of minimal on-site modifications.

Typically, only relocating the motor mount is required for this option. We offer motor mounting options to help minimize the impact of relocating the motor mount, such as flanged motor adapter for c-face or d-flange motors.

Options might include a special low-speed shaft diameter or length and motor lantern.

The red circles in the diagram represent the existing bolt pattern of a customer's unit. The transition base is fabricated to match the height, ensuring alignment of the low-speed shaft to the machine shaft.

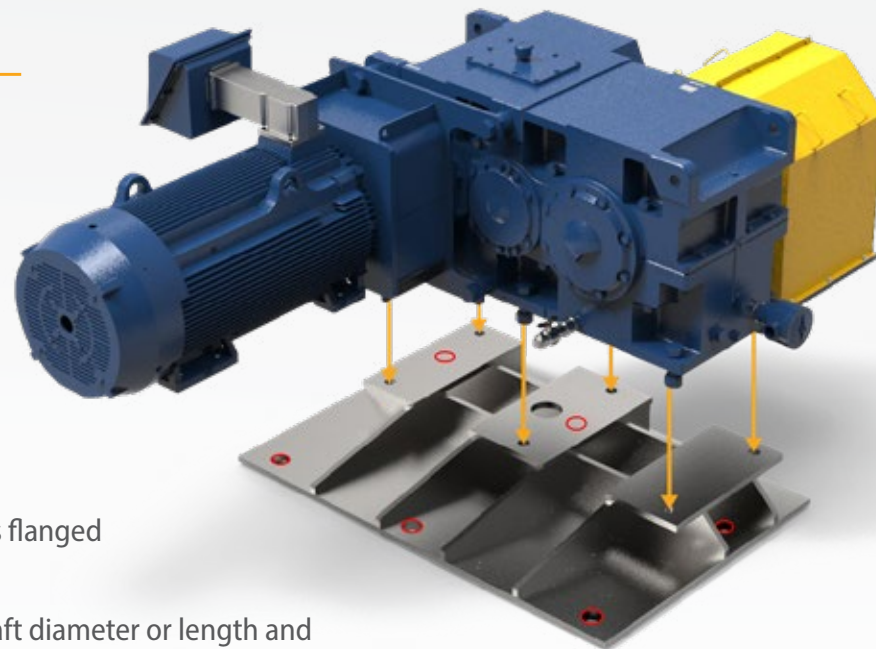

### Drop-In


*Match existing unit's critical dimensions*

With downtime being such a critical factor in your operation, let us install one of our custom drop-in units.

Installation-ready units are designed specifically to drop-in to existing applications with ease. Our expert engineers understand that on-site modifications or re-engineering your system is not always an option.


These stress-free units can have your application back up and running in no time. We offer fabricated steel housings, custom baseplates, custom gearing and shafting and more!

**This product will literally drop-in to place; same footprint, same shaft positions!**

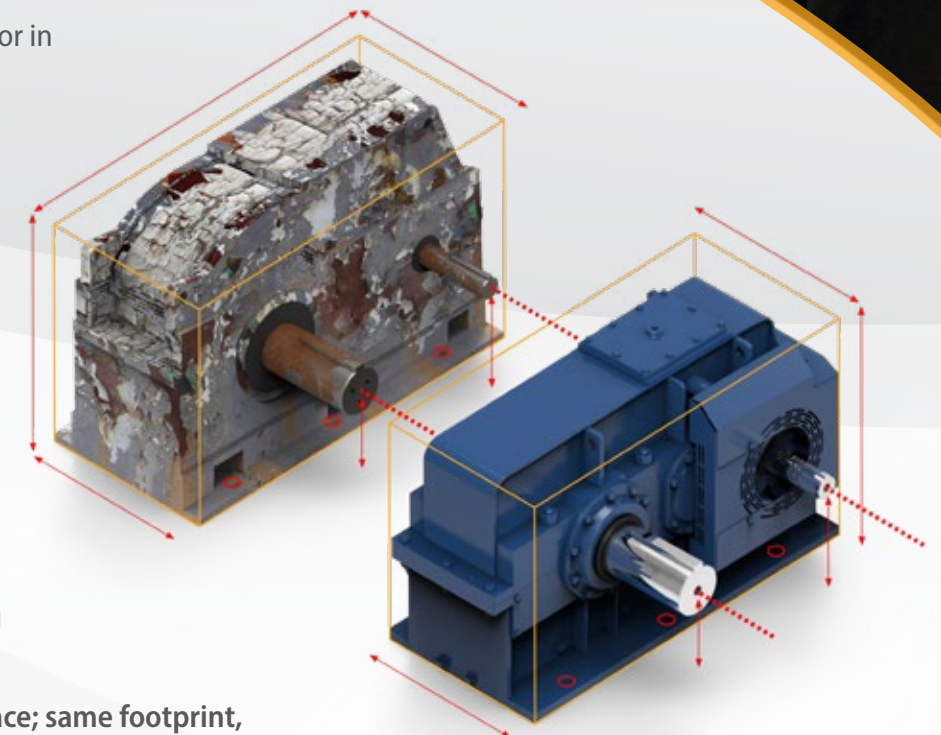

## Specialty Units

For non-standard gearing and custom ratios, we offer special customized units to fit in any application. From custom paint to intricate gearbox lubrication systems, our team of engineers will make sure all of your custom gearbox needs are met.

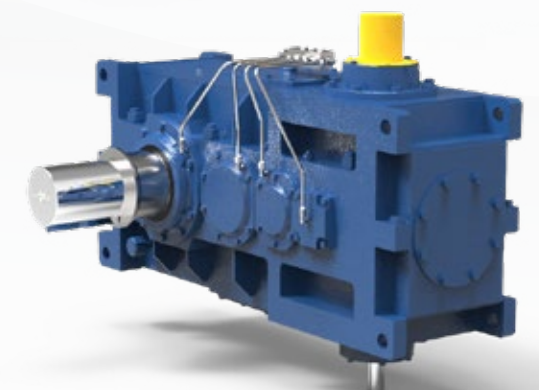



*We take asset management seriously,  
because we know you do.*

*Avoid catastrophic failure, minimize risk  
and increase machine uptime.*

### System Management And Reliability Technology (SMART)

SMART is a range of products and reducer options that were developed to help end users in their reliability and asset management initiatives within their plant's daily operations.



#### Condition Monitoring

Fully customizable systems provide real time condition data of any piece of rotating equipment. Providing an accurate condition signal without the need for further analysis

#### All Gearboxes

#### OPTIONS \*\*

- Vibration + Temperature Input
- Vibration + Oil Level Input
- Vibration + Oil Condition

**WE THINK!**



#### Reliability Monitoring

These reducer option packages will help in the consistent collection of data. For Vibration analysis, as well as oil condition and cleanliness testing

#### Large Industrial Gearboxes

#### OPTIONS\*

- Opt 1: Machined Accelerometer Mounting Pads Only
- Opt 2: Opt 1 + Accelerometers Wired to Junction Box
- Opt 3: Opt 2 + Outputs to Customer PLC or DCS

**YOU THINK!**

### CycloSMART® Benefits

- **Safe**  
Monitor assets from the safety of your desk via networked connections
- **Predictive**  
Machine diagnostics for early warning and detection to avoid failure
- **Optimization**  
Customizable systems to meet many different application needs
- **Expandable**  
Multi-reducer monitoring
- **Reliable**  
Schedule machine downtime to avoid lost production
- **Cost-Effective**  
Lower overall ownership cost



\* All DriveSMART options include: Hydrosopic breather with 3mm filter, drain/fill connection for on-line filtration, and oil sample pitot tube port.

\*\* All CycloSMART® systems are customizable with many different options for data monitoring. Examples are shown.

Learn more at:  
[SumitomoDrive.com/CycloSmart](http://SumitomoDrive.com/CycloSmart)





Our factory capabilities support all of your gearbox needs.



Repairs Scheduled & Emergency Repair

Repair services for all your related gearbox needs and 24-72 hour turnaround to the original factory specifications and warranty using Sumitomo-manufactured parts.

Extended warranty programs are available upon request.

Root Cause Investigation Product Support

Apply a wide range of approaches, tools and techniques to uncover the causes of your problems.

Field Services For Your Convenience

Most of the services offered and customized training can be performed on location.

Aftermarket


Our personnel are the industry's most versed gearbox problem solvers. We provide both standard and tailored services, for maximum gearbox life.

Experts in Service Global Support, Local Service

With a vast network of engineers and gearing experts, there is no problem we can't handle.

In addition to our extensive network, LUFTEX Gears Manufacturing and Services provides unmatched capabilities and expertise in the area of custom gearbox repair and service. With state-of-the-art equipment, no gearbox is too big for us to handle.

Whether custom gear manufacturing or on-site gearbox repair, let our team at LUFTEX keep your operation running.

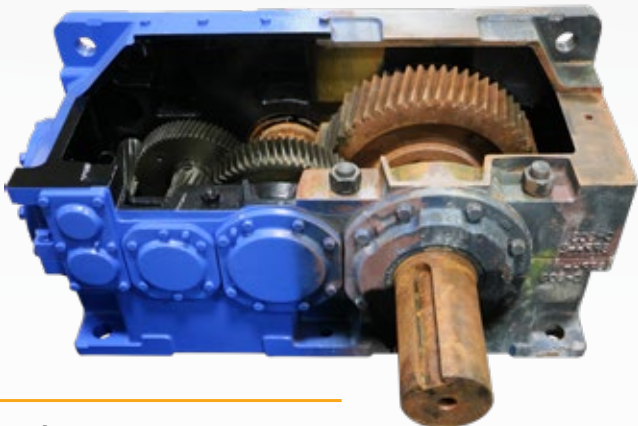

Centers of Excellence

Our Centers of Excellence offer customers a nationwide support network. From inventory distribution to manufacturing to assembly, we have the team to ensure high quality, responsiveness, on-time delivery, and quick lead times.



Chesapeake, VA

Manufacturing, Support, Inventory, and Training  
Our Western Hemisphere headquarters has 250,000 sq ft of manufacturing space, and cutting-edge technology. Centralized inventory distribution with a Foreign trade zone (FTZ), focused on inventory optimization, motor assembly, and hands-on training at our Power Institute.



Verona, VA

Industrial Gearbox Production  
This purpose-built facility is specifically designed to handle the assembly of our large industrial gearboxes.



Glendale Heights, IL

Gearmotor Assembly and Support  
Our Mid-West facility is optimized for high volume solutions focusing on small to medium gearmotors.



Lufkin, TX

Manufacturing and Services  
This 32,000 sq ft facility handles gear manufacturing, gearbox repairs, and reverse engineering.



Corona, CA

Gearmotor Assembly and Support  
Our West Coast facility offers dynamic product and service solutions timely for the Pacific coast region.

